

Landscape



SPECIFICATIONS	7' WIDE: 7,000 GVWR			8.5' WIDE: 7,000 GVWR					8.5' WIDE: 10,000 GVWR					
SIZES	7′x12′	7'x14'	7'x16'	8.5'x16'	8.5'x18'	8.5'x20'	8.5'x22'	8.5'x24'	8.5'x16'	8.5'x18'	8.5'x20'	8.5'x22'	8.5x24′	
Body Length:	12′9″	14′9″	16′9″	16′9″	18′9″	20'9"	22'9"	24'9"	16′9″	18′9″	20'9"	22'9"	24'9"	
Body Width:	7′0″	7′0″	7′0″	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	
Overall Length:	16'8"	18'8"	20'8"	20'6"	22'6"	24'6"	26'6"	28'6"	20'6"	22'6"	24'6"	26'6"	28'6"	
Overall Width:	8′6″	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	
Overall Height:	8′7″	8′7″	8′7″	8′7″	8′7″	8′7″	8′7″	8′7″	8'8"	8'8"	8'8"	8'8"	8'8"	
Interior Length:	12'2"	14'2"	16'2"	16'2"	18′2″	20'2"	22'2"	24'2"	16′2″	18′2″	20'2"	22'2"	24'2"	
Interior Width:	6′8″	6′8″	6′8″	8′0″	8′0″	8′0″	8′0″	8′0″	8′0″	8′0″	8′0″	8′0″	8′0″	
Interior Height:	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	6′7″	
Platform Height:	22"	22"	22"	22"	22"	22"	22"	22"	23"	23"	23"	23"	23"	
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/D	15"/D	15"/D	15"/D	15"/D	
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	
Hitch Ball Size:	2 ⁵ /16"	25/16"	25/16"	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ / ₁₆ "	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ /16"	2 ⁵ /16"	
Hitch to Top of Ball:	20"	20"	20"	20"	20"	20"	20"	20"	21"	21"	21"	21"	21"	
Hitch Weight (% of Curb Weight):	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	
Curb Weight:	2110	2275	2440	2905	3125	3345	3565	3785	3070	3290	3510	3730	3950	
GVWR:	7000	7000	7000	7000	7000	7000	7000	7000	10,000	10,000	10,000	10,000	10,000	
Average Payload Capacity:	4890	4725	4560	4095	3875	3655	3435	3215	6930	6710	6490	6270	6050	
Rear Door Dimensions: W x H	75" x 73"	75" x 73"	75" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	94" x 73"	
Side Door Dimensions: W x H	36" x 66"	36" x 66"	36" x 66"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	
Tube Main Rails:	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	
12 Volt End Connector:	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	



ENGINEERING

- **Rear Ramp Door with Spring Assist**
- **Drop-Down Stabilizer Jacks** 2)
- Flow-Thru Sidewall Vents
- 15" Radial Tires with Silver Spoke Wheels
- 5) Smooth Aluminum Fenders
- 6) E-Z Lube Hubs
- 7) Torflex® Rubber Torsion Suspension (4" Drop)
- 8) Crossmembers on 16" Centers
- 9) Protective Barrier Between Floor & Sidewall
- 10) Vapor Barrier (Helps reduce Electrolysis)

- 11) Entire Chassis Undercoated
- 12) 24" ATP Stoneguard
- 13) 3-Piece A-Frame (12" Additional Length)
- 14) Reinforced Front Wall (Vertically Studded)
- 15) Silver TPO Front Cap (Less Likely to Fade & Crack)
- 16) .080 Aluminum Roof Cove with Drip Rail
- 17) 36" Pre-Framed Side Door with Flush Lock & Dead Bolt
- 18) Bar Lock Assembly for Added Security
- 19) Vertical Posts on 16" Centers
- 20) One-Piece Aluminum Roof

- 21) Tubular Steel Roof Bows on 24" Centers
- 22) Silver Frost Rear Accents (Corners & Header)
- 23) Dexter® Nev-R-Adjust Self Adjusting Brakes


MORE STANDARD FEATURES (Not Shown)

- 3/8" Plywood Interior Sidewall Liner
- 3/4" Pressure-Treated Plywood Floor & Ramp Deck
- 12v Dome Light (2) & Cargo Light (1)
- LED Tail Lights (7'W = Oval, 8.5'W = Slim Line)
- Secure wire connections & controlled routing



EXTERIOR COLORS

.030 Prefinished Aluminum Skin

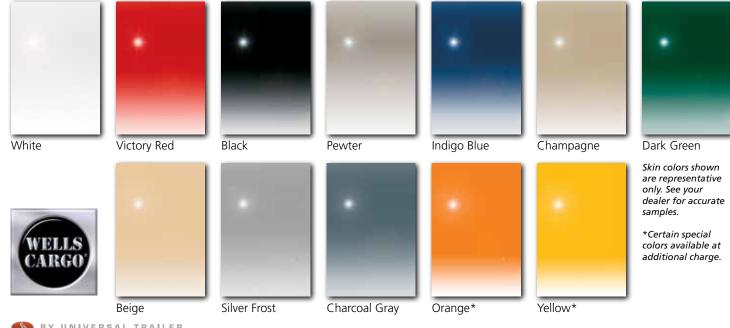

©Wells Cargo, Inc. 2011 LITHO USA Form RFLS0811R1012