


**YOUR  
PASSION IS  
RACING****OUR PASSION IS  
TRAILERS**

Haulmark® understands and appreciates your passion for racing. We feel the same way about trailers. That's why we put so much heart into our EDGE® series. Heart in the form of superior engineering, head-turning style, unmatched performance, and dependability you can bank on. You need that "Edge" to be in the winner's circle - Haulmark's got it!

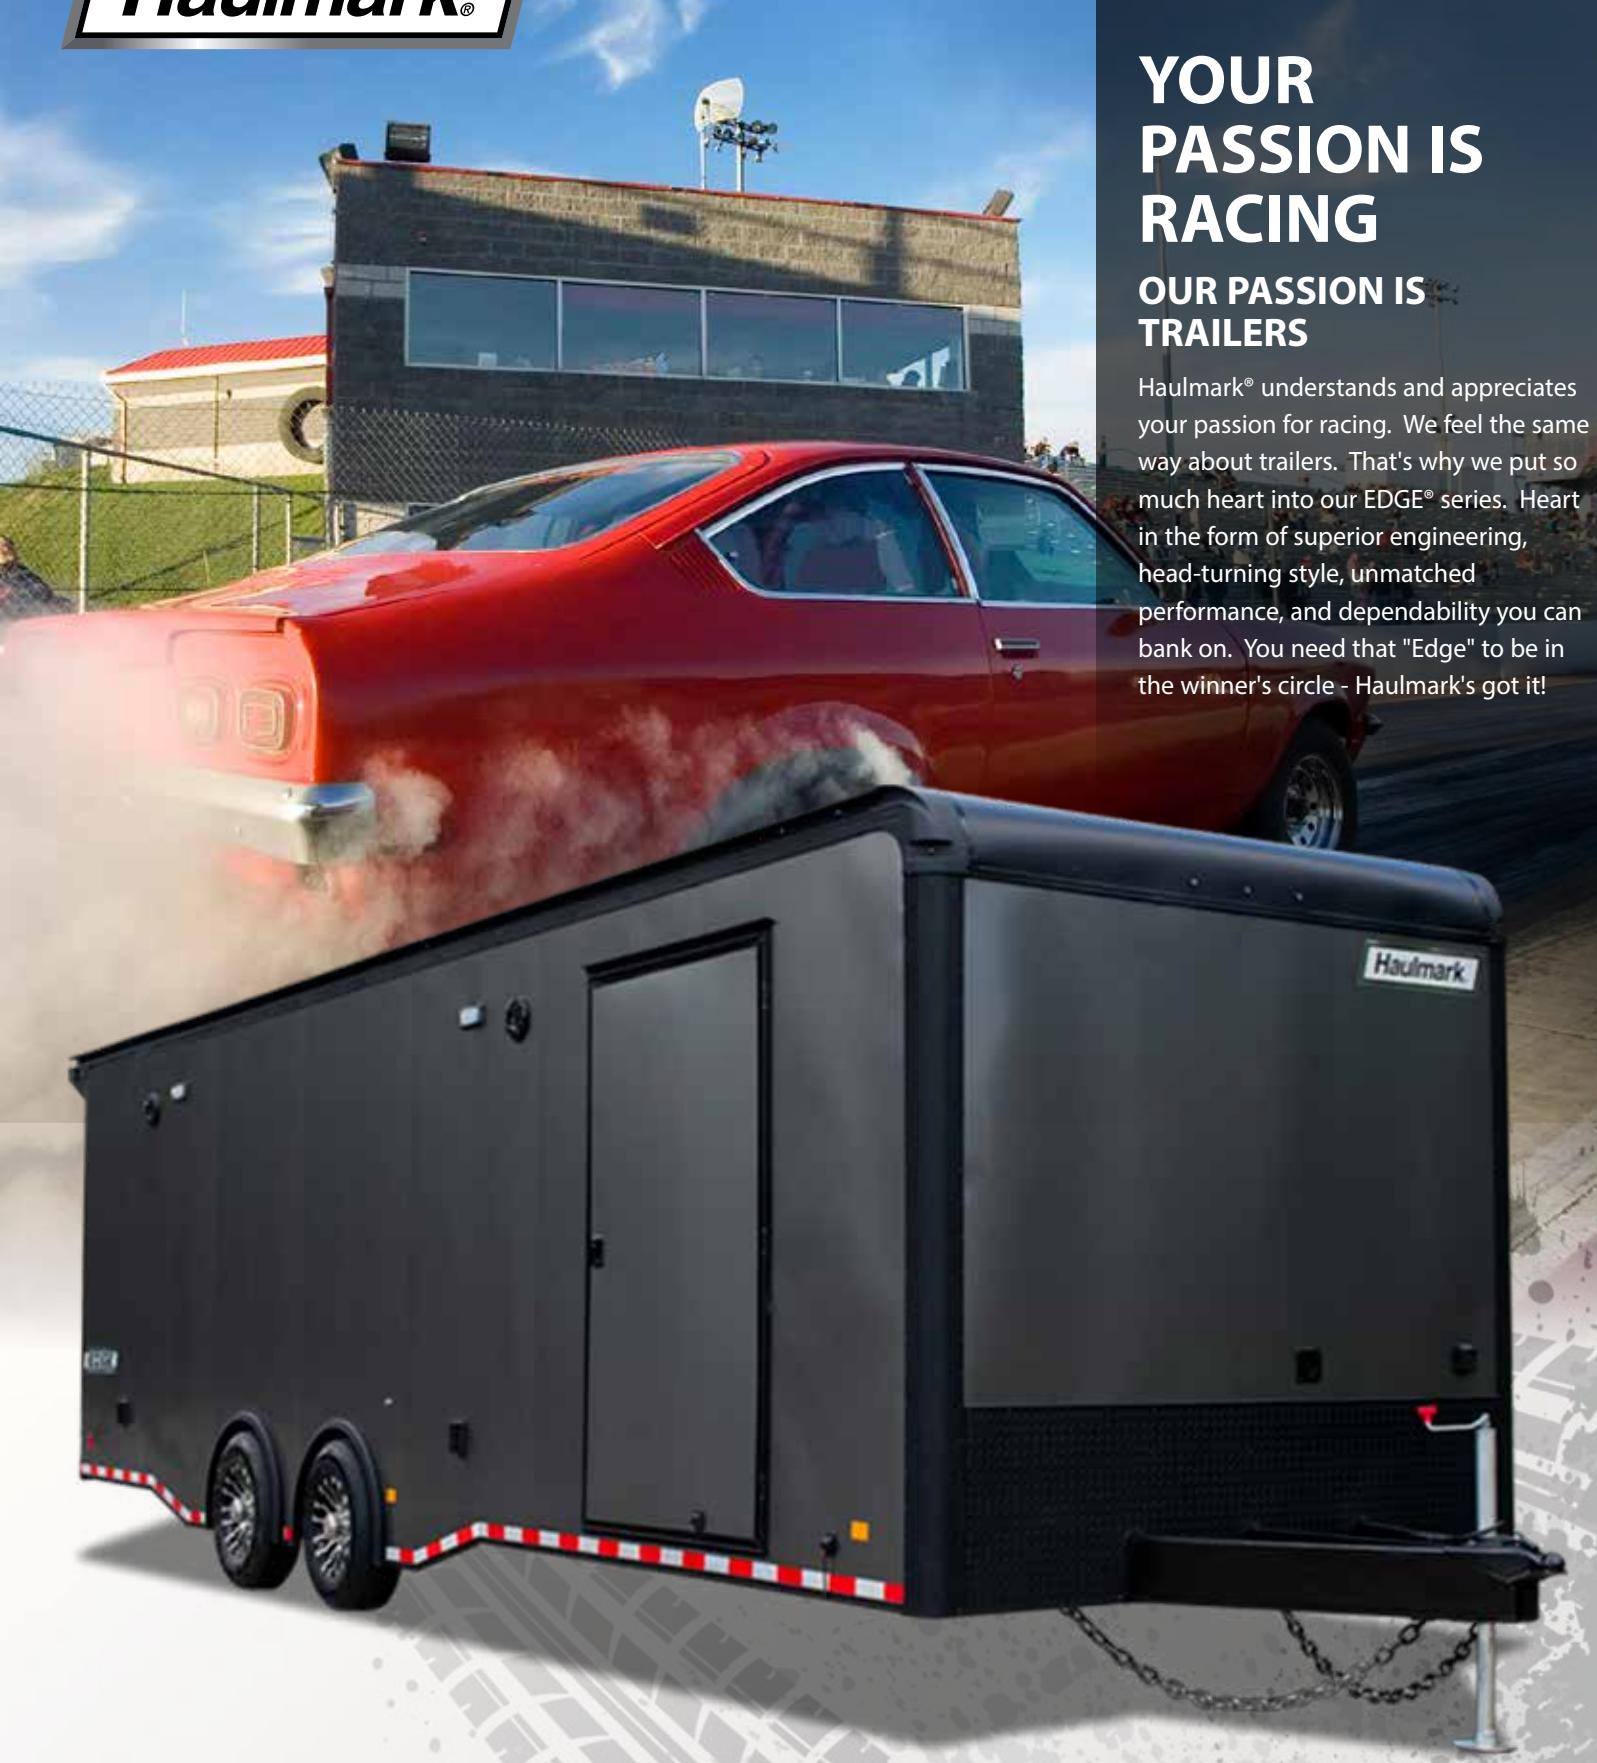

Trailers shown may feature optional equipment available at an additional charge.

# SPECIFICATIONS

**EDGE**  
by Haulmark

		EGP8520T3	EGP8524T3	EGP8528T4	EGP8532R4
<b>Body:</b>	<b>Length Width</b>	20' 0" 8' 4"	24' 0" 8' 4"	28' 0" 8' 4"	32' 0" 8' 4"
<b>Overall:</b>	<b>Length Width Height (to top of roof vent)</b>	24' 7" 8' 6" 9' 1"	28' 7" 8' 6" 9' 1"	32' 7" 8' 6" 9' 3"	36' 7" 8' 6" 9' 3"
<b>Interior:</b>	<b>Length Width Height</b>	19' 8" 8' 1" 6' 10"	23' 8" 8' 1" 6' 10"	27' 8" 8' 1" 6' 10"	31' 8" 8' 1" 6' 10"
<b>Width Between Wheel Boxes</b>		83"	83"	83"	83"
<b>Height of Wheel Box from Floor</b>		10"	10"	10"	10"
<b>Platform Height at Beavertail</b>		19"	19"	21"	21"
<b>Torflex® Suspension E-Z Lube® Axles: Qty</b>		Tandem	Tandem	Tandem	Triple
<b>Electric Brakes with Breakaway Kit</b>		Electric Drum	Electric Drum	Electric Drum	Electric Drum
<b>Goodyear® Radial Tire Size</b>		ST225/75R15	ST225/75R15	ST235/85R16	ST235/85R16
<b>Tire Load Range</b>		E	E	E	E
<b>Hitch Ball Size</b>		2-5/16"	2-5/16"	2-5/16"	2-5/16"
<b>Hitch Height to Top of Ball</b>		20"	20"	22"	22"
<b>Hitch Weight (% of Curb Weight)</b>		10% - 15%	10% - 15%	10% - 15%	10% - 15%
<b>GVWR</b>		9,990 lbs.	9,990 lbs.	12,000 lbs.	18,000 lbs.
<b>Rear Ramp Door Opening - Width x Height</b>		96" x 78"	96" x 78"	96" x 78"	96" x 78"
<b>12v Male Connection</b>		7-way	7-way	7-way	7-way
<b>Tube Main Rails</b>		2" x 6"	2" x 6"	2" x 8"	2" x 8"
<b>Beavertail</b>		48"	48"	72"	72"

## STANDARD FEATURES

- Flat Front/Flat Roof Truck-Body Design
- Roof and Sidewall Structure
  - 16" OC C-Channel Floor Crossmembers
  - 16" OC Tube Sidewall Posts
  - 16" OC Tube Roof Structure
- 54" A-Frame with Center Tube
- Skid Pads Rear Corners
- No-Show Beavertail
- 2<sup>5/16</sup>" Adjustable Wallace Forge® 20K Cast Coupler (*Made in the USA*)
- Square Tube 8K Drop Leg Side Wide Jack with Footplate (*Bolt-On/Replaceable*)
- .080 ACP Panels (*Select Colors*)
- Cast Aluminum Corners (*Front & Rear*)
- Stainless Steel Cap and Front Corners
- Polished Aluminum Rear Corners & Header
- 1-Piece Aluminum Roof
- ArmorTech™ on A-Frame and Rear End Rail
- 24" ATP Stonguard
- Spring-Assisted Rear Ramp Door with 96"W Opening
- 16" FlexCore™ Ramp Extension
- Heavy-Duty Recessed Paddle Latches on Rear Ramp Door
- 36" x 78" Side Entry Door with Recessed Step
- Torflex® Spread Axle Design with Drop Skirting
- Goodyear® Radial Tires with Black Viper Aluminum Wheels
- 12v Smoke Lens LED Exterior Lighting
- 12v Smoke Lens Stop/Tail/Turn/Back-Up Lights (3 pr.)
- 12v LED Dome Lights with Wall Switch (4)
- 14" x 14" Non-Powered Roof Vent (2)
- 5,000 lbs. Square D-Rings with Welded Plate (4)
- 3/4" FlexCore™ High Performance Decking
- 3/8" FlexCore™ High Performance Sidewall Liner
- Economy Ceiling Liner
- 3-Year Limited Warranty



Turbo Package with additional **optional** equipment available at additional cost.

