



D I V E R S E R A N G E O F S T E E L A N D A L U M I N U M T R A I L E R S


PERFORMANCE YOU

DIVERSE PRODUCT LINE

Engineered to be the best pulling, longest lasting trailers on the market, **H&H** offers the broadest selection of models from one manufacturer. Choose from a variety of steel and aluminum framed utility, landscape, car hauler, equipment, and deckover trailers, or one of our steel dump trailers. If you're looking for an enclosed model, we've got you covered with several sizes and style options. No matter what you choose, **H&H** has what you want and what you need...Trailers for every need and every budget.

EXCEPTIONAL SERVICE

Service is the foundation behind **H&H** and our trailers. We engineer and build top quality products at the best value while providing exceptional service – whether it's helping you find the trailer most suitable to your needs, or fixing a problem you encounter. With a core group of trailer manufacturing professionals and partnering dealers with years of experience, our team is available to answer your questions and help you choose a trailer that meets your needs, but exceeds your expectations.

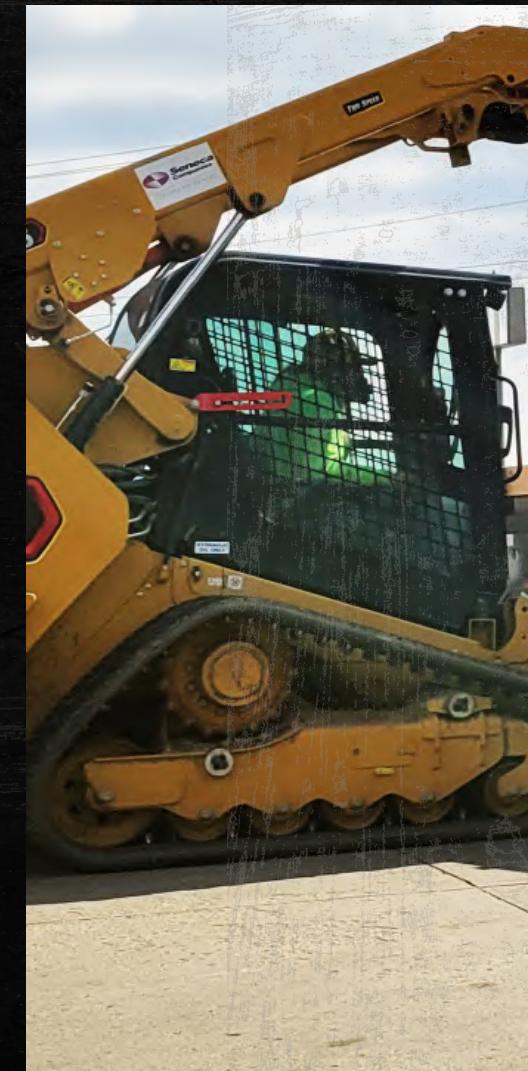

CAN COUNT ON.

TABLE OF CONTENTS



- 04** LANDSCAPE AND UTILITY
- 08** CAR HAULERS
- 12** HYDRAULIC DUMPS
- 16** EQUIPMENT TRAILERS
- 20** DECKOVER TRAILERS
- 24** ENCLOSED TRAILERS

VISIT OUR SITE:
HHTRAILER.COM




LANDSCAPE & UTILITY TRAILERS

H&H Landscape and Utility Trailers offer versatility to haul equipment for your active lifestyle or your landscape needs. Leading features provide you reliability you can count on day in and day out.

H&H TRAILERS ADVANTAGE


TIE-DOWN POINTS

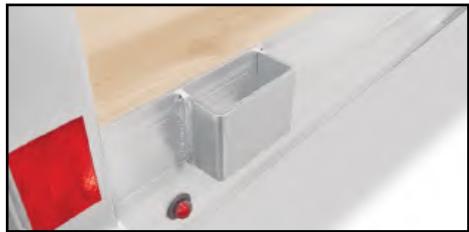

ALUMINUM MODELS



SETBACK JACK

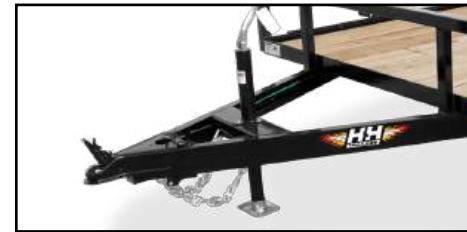

SPARE TIRE CARRIER



Multiple tie-down points help keep your load safe and secure.

Our popular steel models also have an aluminum twin! These sleek and lightweight models feature aluminum wheels standard.

Safely located out of reach of your tailgate to help prevent accidental damage.

While a flat tire is never convenient, our spare tire carrier definitely is (standard on steel models).

ATV



- Steel Angle Frame and Crossmembers
- 2" x 2" Steel Tube Top Rail
- 4" Channel Tube Tongue (Tandem Models Wrapped)
- Stake Pockets
- Spring Assisted Ramp Gate

Size	GVWR	Payload	Deck Width
82" x 12' SA	2990	1600	82.25"
82" x 14' SA	2990	1580	82.25"
82" x 14' TA	7000	5040	82.25"
82" x 16' TA	7000	4950	82.25"
82" x 18' TA	7000	4860	82.25"
82" x 20' TA	7000	4770	82.25"



SIDE-STORING ATV RAMPS



STAKE POCKETS


ALUMINUM ATV




STAKE POCKET TIE-DOWNS

- Aluminum Angle Extrusion Frame with Reinforcement
- Aluminum Triple Tube Tongue (Tandem Models Wrapped)
- 2" x 2" Square Tube Top Rail
- Aluminum Wheels

Size	GVWR	Payload	Deck Width
82" x 12' SA	2990	1990	82.25"
82" x 14' SA	2990	1900	82.25"
82" x 14' TA	7000	5415	82.25"
82" x 16' TA	7000	5350	82.25"
82" x 18' TA	7000	5260	82.25"
82" x 20' TA	7000	5100	82.25"

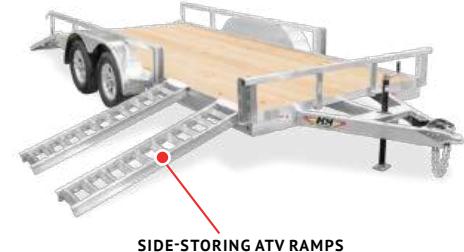

SIDE-STORING ATV RAMPS

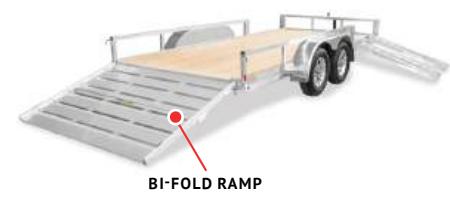

BI-FOLD RAMP

RAIL SIDE



- 4" Steel Channel Tongue
- 2" x 2" Square Tube Top Rail
- 1-1/2" x 2" Tube Uprights
- Stake Pockets
- Enclosed Sealed Wiring



SPARE TIRE CARRIER

Size	GVWR	Payload	Deck Width
66" x 10' SA	2990	2100	66.25"
76" x 12' SA	2990	1940	76.25"
82" x 12' SA	2990	1880	82.25"
82" x 14' SA	2990	1780	82.25"
82" x 16' TA	7000	5210	82.25"
82" x 18' TA	7000	5110	82.25"



ALUMINUM RAIL SIDE



- Aluminum Triple Tube Tongue
- 2" x 2" Square Tube Top Rail
- Stake Pockets
- Aluminum Wheels

Size	GVWR	Payload	Deck Width
60" x 08' SA	2990	2340	60.25"
76" x 12' SA	2990	2070	76.25"
82" x 12' SA	2990	2010	82.25"
82" x 14' SA	2990	1920	82.25"
82" x 16' TA	7000	5450	82.25"
82" x 18' TA	7000	5360	82.25"



PRESSURE TREATED LUMBER

Additional Sizes Available.

Additional Sizes Available.

HEAVY DUTY RAIL SIDE




- 5" Channel Tongue, Wrapped
- 3" x 2" Tube Top Rail on Tube Uprights
- Reinforced Ladder Style, Spring Assisted Gate
- 2800 lb Load Rating
- Enclosed Sealed Wiring
- Stake Pockets

Size	GVWR	Payload	Deck Width
82" x 16' TA	9900	7690	82.25"
82" x 18' TA	9900	7620	82.25"
82" x 20' TA	9900	7500	82.25"
82" x 22' TA	9900	7380	82.25"
82" x 24' TA	9900	6670	82.25"



7000 LB RATED
DROP LEG JACK

SOLID SIDE



- 15" Tall Solid Steel, 12-Gauge Sides
- 4" Steel Channel Tongue
- Enclosed Sealed Wiring Harness
- Welded Front Board Retainer



SPARE TIRE CARRIER

Size	GVWR	Payload	Deck Width
60" x 8' SA	2990	2160	60.25"
66" x 10' SA	2990	2080	66.25"
76" x 10' SA	2990	1960	76.25"
82" x 12' SA	2990	1820	82.25"
82" x 16' TA	7000	5210	82.25"
82" x 18' TA	7000	5110	82.25"
82" x 20' TA	7000	5030	82.25"




ALUMINUM SOLID SIDE



FLOOR MOUNTED D-RINGS

- 4" Triple Tube Tongue
- 15" Tall Polished Aluminum Tread Brite Sides
- 2000 lb Rated Swivel Jack with Wheel
- Aluminum Wheels

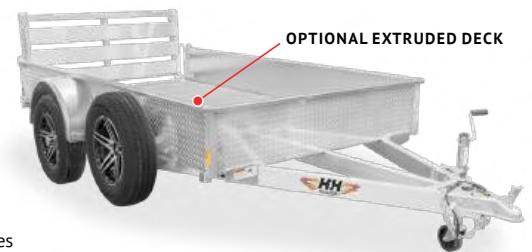

OPTIONAL EXTRUDED DECK

Size	GVWR	Payload	Deck Width
60" x 8' SA	2990	2250	60.25"
66" x 10' SA	2990	2140	66.25"
76" x 10' SA	2990	2110	76.25"
76" x 12' SA	2990	1980	76.25"
82" x 12' SA	2990	1950	82.25"
82" x 14' SA	2990	1860	82.25"



OPTIONAL SPARE TIRE AND CARRIER

Additional Sizes Available.

WOOD SIDE



- 19.5" Tall, 3-Board Treated Wood Sides
- 2" x 2" Square Tube Top Rail
- Spare Tire Carrier
- Spring Assisted Ramp Gate

Size	GVWR	Payload	Deck Width
60" X 8' SA	2990	2045	60.25"
66" x 10' SA	2990	1900	66.25"
76" x 10' SA	2990	1850	76.25"
76" x 12' SA	2990	1740	76.25"
82" x 12' SA	2990	1700	82.25"
82" x 14' SA	2990	1590	82.25"



- 19.5" Tall, 3-Board Treated Wood Sides
- 2" x 2" Square Tube Top Rail
- Internal Mounted, D-Rings
- 2000 lb Rated Swivel Jack with Wheel

Size	GVWR	Payload	Deck Width
60" X 8' SA	2990	2045	60.25"
66" x 10' SA	2990	1900	66.25"
76" x 10' SA	2990	1850	76.25"
76" x 12' SA	2990	1740	76.25"
82" x 12' SA	2990	1700	82.25"
82" x 14' SA	2990	1590	82.25"



ALUMINUM LOW SIDE



- 5" Aluminum Tube Extrusion Frame
- Custom Fabricated Corner Gussets
- Extruded Aluminum Deck
- Aluminum Stake Pockets
- (4) D-Rings, Corner Mounted
- 16-1/2" Deck Height

Size	GVWR	Payload	Deck Width
78" x 10'	2990	2270	78"
78" x 12'	2990	2220	78"
78" x 14'	2990	2170	78"



RAIL SIDE

LANDSCAPE & UTILITY TRAILERS

CAR HAULER TRAILERS

On or off the clock, H&H Car Hauler Trailers are the proven solution for towing your vehicle, ATV or side-by-side, compact tractor, or any light equipment and materials with confidence. With a wide range of models and options, we have the perfect trailer for your vehicle.

For complete protection from the elements, check out our H&H Enclosed Car Hauler Trailers on page 26.

H&H TRAILERS ADVANTAGE

SETBACK TONGUE JACKS



Safely located out of reach of your tailgate to help prevent accidental damage.

SEALED WIRING HARNESS



For added protection against the elements, each trailer is equipped with a sealed wiring harness.

REMOVABLE FENDERS



Great for providing additional clearance for your car doors. Standard on aluminum models.

UNDERCARRIAGE RAMP STORAGE



Keeps your ramps secure and easy to access at the rear of the trailer.

CAR HAULER



- 2' Steel Tread Plate Dovetail
- Stake Pockets
- Spare Tire Carrier
- 82" Clearance Between Fenders



Size	GVWR	Payload	Deck Height
82" x 16' + 2'	7000	4890	23"
82" x 18' + 2'	7000	4770	23"
82" x 20' + 2'	7000	4650	23"
82" x 16' + 2'	9900	7500	24"
82" x 18' + 2'	9900	7270	24"
82" x 20' + 2'	9900	7035	24"


ALUMINUM CAR HAULER



- Aluminum Channel Frame and Crossmembers
- Fully Wrapped Channel Tongue
- Stake Pockets and Rub Rail
- Removable Fenders
- Aluminum Wheels
- 82" Clearance Between Fenders



Size	GVWR	Payload	Deck Height
82" x 16' + 2'	7000	5390	24"
82" x 18' + 2'	7000	5315	24"
82" x 18' + 2'	9900	7840	26"
82" x 20' + 2'	9900	7700	26"
82" x 22' + 2'	9900	7560	26"

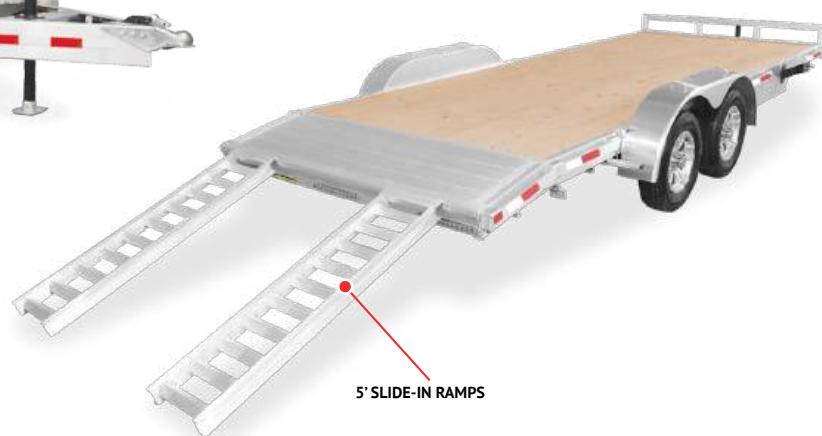

SPEED LOADER TILT



SPARE TIRE CARRIER



CHAIN SLOTS

- Steel Channel Construction
- Fully Wrapped Tongue
- Custom Pivot Design
- Tapered Reverse Dove
- Steel Tread Plate Formed Fenders
- Front and Rear End Board Caps
- Sealed Wiring Harness

MANUAL TILT

Size	GVWR	Payload
82" x 18'	7000	5100
82" x 20'	7000	4990
82" x 22'	9900	7200
82" x 24'	9900	7070

Hydraulic Cylinder Jack
(MX) Manually Operated

ELECTRIC TILT

Size	GVWR	Payload
82" x 18'	7000	5040
82" x 20'	7000	4810
82" x 22'	9900	7110
82" x 24'	9900	6900

Hydraulic Cylinder Jack
(EX) Electric Power Operated Pump



Length	Load Angle
18'	14°
20'	12°
22'	11°
24'	9°

ALUMINUM SPEED LOADER TILT



REMOVABLE FENDER





2-BUTTON CORDED REMOTE

- Stake Pockets and Rub Rails
- Aluminum Tread Brite Pump and Battery Storage
- Electric Powered Hydraulic Tilt Cylinder
- Powder Coated Attaching Hardware
- Aluminum Wheels

Size	GVWR	Payload	Load Angle
82" x 18'	7000	5330	14°
82" x 20'	7000	5250	12°
82" x 22'	9900	7650	11°
82" x 24'	9900	7550	9°

OPTIONAL FRONT ROCK GUARD

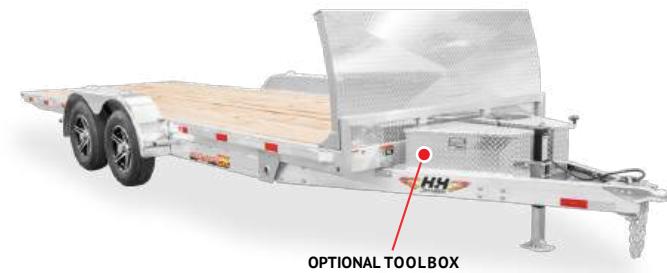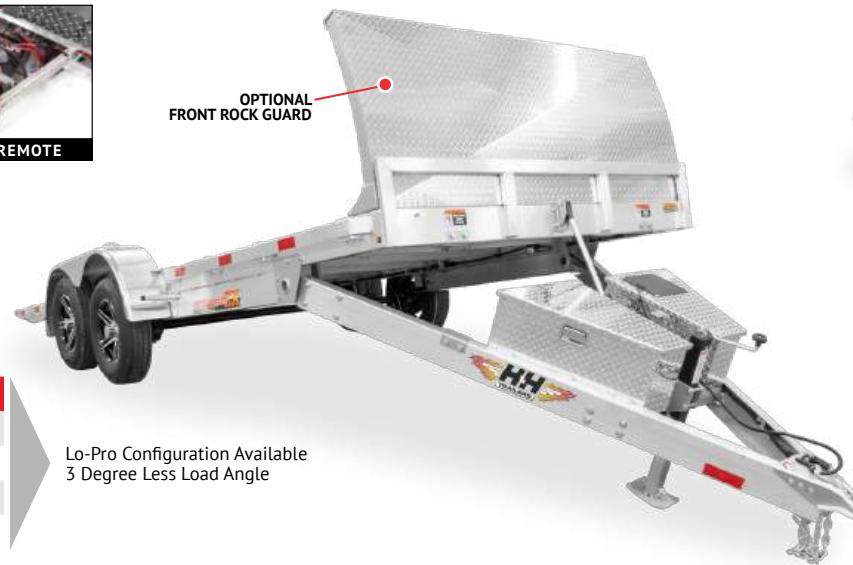

HEAVY DUTY SPEED LOADER TILT



- Channel Steel Frame
- I-Beam Gooseneck Construction
- Electric Powered Hydraulic Tilt Cylinders
- Lockable Pump and Battery Storage
- 12000 lb Rate Drop Leg Jack (Dual on Gooseneck)
- Heavier Suspensions Available

Size	GVWR	Payload	Load Angle
82" x 26'	14000	10000	10°
82" x 26' GN	14000	9500	10°
82" x 28' GN	14000	9250	8°
82" x 30' GN	14000	9000	6°



REVERSE TAPERED DOVETAIL



HYDRAULIC DUMP TRAILERS

H&H Dump Trailers are built tough and proven to work hard for you. Each model is thoughtfully designed with key features to assist in your hauling needs – from a variety of materials like rock, dirt and debris to small and medium-sized equipment.

With light-duty to heavy-duty designs in a variety of sizes and payload configurations, H&H has a Dump Trailer that is right for you.

H&H TRAILERS ADVANTAGE

POWER HYDRAULICS



Quickly raise and lower your bed with a 12V hydraulic pump and deep cycle battery.

PUMP AND BATTERY STORAGE



Safe and clean storage for your hydraulic pump, battery and remote.

WELDED D-RINGS



Secure your equipment for a safe haul with the internal mounted D-rings.

SPARE TIRE CARRIER



While a flat tire is never convenient, our standard spare tire carrier definitely is (4.5x8 Homeowner excluded).

4.5x8 HOMEOWNER



POWER UP, POWER DOWN

- Removable Side Panels Work as Ramps
- Anti-Skid Finish on Ramps
- 12" Tall Sides
- D.O.T. Certified Street Legal
- Electric Hydraulic Lift Cylinder
- Swivel Jack with Wheel

Size	GVWR	Payload
4.5' x 8'	2900	1960



HOMEOWNER



SPREADER FUNCTION

- 15" Tall, 12-Gauge Sides
- One-Piece Smooth Steel Floor
- Barn Door Gate with Spreader Function
- Single Stroke Lift Cylinder
- Tarp Brackets
- Spring Brake Suspension

Size	GVWR	Payload
62" x 8' SA	5000	3600
62" x 10' TA	7000	5110



UTILITY



INTEGRATED SIDE STEP

- 24" Tall, 12-Gauge Sides
- Barn Door with Spreader Gate Function
- Two 3" X 5' Steel Ramps in Carrier
- Integrated Tarp Shroud
- Power Up, Power Down Hydraulics
- 7000 lb Rated Drop Leg Jack
- 76" Interior Box Width

Size	GVWR	Payload
76" x 10'	9900	7110
76" x 12'	9900	7030



INDUSTRIAL CHANNEL



SCISSOR HOIST

- One-Piece Smooth Steel Floor
- Reinforced Top Rail
- Two 3" X 5' Steel Ramps in Carrier
- Integrated Tarp Shroud, Tarp and Anti-Sail Rod
- Tarp Brackets and Tarp Hooks
- 83" Interior Box Width
- Gooseneck Hitch Available

Size	GVWR	Payload
83" x 14'	14000	9900
83" x 16'	14000	9450
83" x 14'	16000	11750
83" x 16'	16000	11300



INDUSTRIAL I-BEAM



SPARE TIRE CARRIERS



6' H.D. RAMPS IN CARRIER

- 8", 13 lb/ft Steel I-Beam Main Frame and Tongue
- 8", 13 lb/ft Steel I-Beam Tongue
- 3" Steel Channel Crossmembers
- 16" On-Center Spacing
- Custom Formed Top Rail
- 24" Tall, 12-Gauge Steel Sides
- 10-Gauge One-Piece Smooth Bed
- Stake Pockets
- D-Rings, Side Mounted
- Ramp Hook Bar and Ramp Carrier
- Barn Door with Spreader Function
- Spare Tire Carriers
- Sealed Wiring Harness
- Integrated Tarp Mount and Shroud
- Mesh Tarp Kit (Installed)
- Rear Anti-Sail Tarp Retention Bow Kit
- Tarp Brackets and Tarp Hooks
- 110V 5amp Trickle Charger
- 12V Deep Cycle Battery
- 12V Hydraulic Pump (3000 PSI)
- 2-Button Corded Remote

Size	GVWR	Payload
83" x 12'	14000	10120
83" x 14'	14000	9900
83" x 16'	14000	9450
83" x 14'	16000	11750
83" x 16'	16000	11300

Size	GVWR	Payload
83" x 12'	14000	10120
83" x 14'	14000	9900
83" x 16'	14000	9450
83" x 14'	16000	11750
83" x 16'	16000	11300



SCISSOR HOIST

The **Scissor** hydraulic lift system contains a hydraulic cylinder within a hoist mounted to the underside of the trailer, increasing the rigidity between the dump bed and the dump frame. The scissor hoist provides the fastest cycle time of the different hoists with a power up, power down hydraulic pump.



TELESCOPIC HOIST

Rapidly growing in popularity through proven performance, the **Telescopic** hydraulic lift system provides the best mechanical advantage when lifting a load. Having the cylinder mounted upright to the front of the bed directs the lifting force vertically, reducing stress to the frame and pivot points.



TOPLINE® I-BEAM



- Steel Tube Box Frame
- 24" Tall, 10-Gauge Steel Sides
- 7-Gauge One-Piece Steel Deck
- 12K Rated, 2-Speed Drop Leg
- Tarp Brackets and Tarp Hooks
- Ramp Hook Bar and Carrier
- Rear Anti-Sail Tarp Retention Bow Kit
- D-Rings, Side Mounted
- Spare Tire Carrier
- High Gloss Powder Coat Finish
- Sealed Wiring Harness
- 110V 5amp Trickle Charger
- 12V Deep Cycle Battery
- 12V Hydraulic Pump (3000 PSI)
- 2-Button Corded Remote

Size	GVWR	Payload
83" x 14'	15400	10820
83" x 16'	15400	10620
83" x 14'	17600	12780
83" x 16'	17600	12580



EQUIPMENT TRAILERS

Getting heavy equipment to the job site or farm shouldn't be difficult. With durability and strength built in, let H&H Equipment Trailers handle the rugged duty of the heavy haul.

Whether you need to haul a skid steer, scissor lift or tractor, rest assured H&H Equipment Trailers are engineered to withstand your most demanding loads.

H&H TRAILERS ADVANTAGE

DOUBLE BREAK FENDERS



Heavy duty steel tread plate fenders stand up to your rugged jobs.

SETBACK DROP LEG JACKS



Safely located out of reach of your tailgate to help prevent accidental damage.

HEAVY DUTY BULKHEAD



Steel tube design offers additional tie down points to secure your load.

SPRING ASSIST RAMPS



Designed to work as a lift-assist in safely raising and lowering hinged ramps.

INDUSTRIAL



INTEGRATED STEP



ADJUSTABLE DOCK LEGS

- Full Channel Steel Structure, Wrapped Tongue
- Spring Assist Ramps
- 12000 lb Rated Drop Leg Jack
- Adjustable Coupler
- Stake Pockets
- 82" Clearance Between Fenders

Size	GVWR	Payload
82" x 14' + 2'	14000	11310
82" x 16' + 2'	14000	11140
82" x 18' + 2'	14000	10970
82" x 20' + 2'	14000	10700
82" x 22' + 2'	14000	10430



SUPER DELUXE RAMP INDUSTRIAL



FULL WIDTH RAMPS



- Full Channel Steel Structure, Wrapped Tongue
- 4' Self-Cleaning Dovetail
- Full Width Spring Assist Ramps
- Adjustable Coupler
- Spare Tire Carrier
- Stake Pockets
- 82" Clearance Between Fenders

Size	GVWR	Payload
82" x 16' + 4'	14000 16000	10840 12135
82" x 18' + 4'	14000 16000	10700 11955
82" x 20' + 4'	14000 16000	10560 11780



SPRING ASSIST



SINGLE AXLE GRAVITY TILT



LOCKABLE TOOLBOX



4' STATIONARY DECK

- Knife Edge Dovetail
- Torsion Suspension
- Hydraulic Cushion Load Cylinder
- 7000 lb Rated Setback Jack
- Reinforced Tread Plate Fenders

Size	GVWR	Payload
62" x 10'	6000	5060
78" x 12'	7800	4915
78" x 12' + 4'	7800	4800
78" x 12'	9900	7520
78" x 12' + 4'	9900	7350



D-RING TIE-DOWNS

GRAVITY TILT



FORK TUBE OPTION



CYLINDER SHUT-OFF VALVE

- Drop Spring Suspension
- Cylinder Shut Off Valve
- Hydraulic Cushion Load Cylinder
- Dual Locking Hold-down Latches
- Stake Pockets
- Full Tilt Available

Size	GVWR	Payload
82" x 16' + 4'	14000 16000	10800 12290
82" x 16' + 6'	14000 16000	10690 12090
82" x 18' + 4'	14000 16000	10690 12090
82" x 18' + 6'	14000 16000	10460 11900
82" x 20' + 4'	14000 16000	10460 11900



TOPLINE INDUSTRIAL



OVERSIZE STAKE POCKETS



HIGH TENSILE I-BEAM

- 3" Steel Channel, 16" On-Center Spacing
- HD Bulkhead with Integrated Tie-Down Points
- Welded Rear Board Retainers
- (4) 3/4" D-Rings
- Adjustable Pintle Coupler
- Integrated Oversized Toolbox
- Self-Trigger Interior Light and Battery Storage

Size	GVWR 15.4K 17.6K 22K	Payload 15.4K 17.6K 22K
15' + 3'	15400 17600 22000	12120 14080 18080
17' + 3'	15400 17600 22000	11920 13880 17880
19' + 3'	15400 17600 22000	11720 13380 17680



TOPLINE TILT BED



OVERSIZE TOOLBOX



EASY LOCKING TILT BED LATCH

- Tube Crossmembers on 16" Centers
- HD 2-Speed, 12K Rated Drop Leg Jack
- Slipper Spring Suspension
- Hydraulic Cushion Load Cylinder
- Cylinder Shut Off Valve
- Balanced Gravity Tilt
- 4 1/2" Oversized 1/4" Thick Stake Pockets
- (4) 3/4" D-Rings

Size	GVWR 15.4K 17.6K	Payload 15.4K 17.6K
82" x 16' + 4'	15400 17600	11360 13380
82" x 16' + 6'	15400 17600	11220 13180
82" x 18' + 4'	15400 17600	11220 13180
82" x 16' + 6'	15400 17600	11020 12980



DECKOVER TRAILERS

H&H Deckover Trailers are a great choice for hauling heavier equipment or loading supplies like pallets and hay bales. Constructed with quality materials and attention to details, our Deckover Trailers are built to work hard for you.

H&H TRAILERS ADVANTAGE

SPRING ASSIST RAMPS



Attached ramps with spring-assist function are designed to ease heavy lifting.

I-BEAM CONSTRUCTION



Built to withstand the stress of your toughest jobs.

SPARE TIRE CARRIER



While a flat tire is never convenient, our spare tire carrier definitely is.

INTEGRATED STEPS



Allows for easy access to the deck.

STANDARD DUTY



10" I-BEAM FRAME



INTEGRATED STEP



STAKE POCKETS & RUB RAILS



- I-Beam Frame with Channel Tongue, Fully Wrapped
- Setback Jack and Adjustable Coupler
- Heavy Duty Tube Bulkhead
- Spare Tire Carrier
- 30-31" Deck Height

Size	GVWR	Payload
102" x 16'	9900 14000	7150 11000
102" x 18'	9900 14000	6950 10800
102" x 20'	9900 14000	6750 10600
102" x 22'	9900 14000	6450 10250
102" x 24'	9900 14000	6250 10050



OPTIONAL RAMPS AND CARRIER

STANDARD DUTY DOVETAIL



SPARE TIRE CARRIER



SPRING ASSIST RAMPS

- I-Beam Frame with Channel Tongue, Fully Wrapped
- 4' Self-Cleaning Dovetail and Spring Assist Ramps
- Setback Jack and Adjustable Coupler
- Heavy Duty Tube Bulkhead
- Stake Pockets and Rub Rail
- 30-31" Deck Height

Size	GVWR	Payload
102" x 16' + 4'	9900 14000	6600 10450
102" x 18' + 4'	9900 14000	6400 10250
102" x 20' + 4'	9900 14000	6200 10050
102" x 22' + 4'	9900 14000	5900 9750
102" x 24' + 4'	9900 14000	5700 9550



INTEGRATED STEP



ADJUSTABLE DOCK LEGS

LOW PROFILE



DOUBLE SPRING ASSIST RAMPS



INTEGRATED TOOLBOX




Size	GVWR	Payload
102" x 20' + 5'	15000 17600	9475 11650
102" x 25' + 5'	15000 17600	8810 10985
102" x 25' + 5'	22500 25900	15110 14780
102" x 30' + 5'	22500 25900	14540 14350

- Pierced I-Beam Low Profile Design - 33" Deck Height
- Torque Tube System
- 5' Self Cleaning Dovetail
- Full Width Deluxe Ramps
- Pipe Spools and Stake Pockets
- Dual 12000 lb Rated Drop Leg Jacks
- Straight Deck and Bumper Pull Models Available

Additional Sizes Available.

HYDRAULIC TAIL



UNDERBODY PUMP BOX



LOCKING TILT LATCH



8000 LB LOAD CAPACITY
4000 LB LIFT/HAUL CAPACITY



48" SPREAD AXLE CONFIGURATION

Size	GVWR	Payload
102" x 21' + 9'	22500 25900	15100 18060
102" x 23' + 9'	22500 25900	14700 17800
102" x 25' + 9'	22500 25900	14300 17100

- Pierced I-Beam Low Profile Design
- 9' Electric Hydraulic Dovetail
- Pipe Spools and D-Rings
- Full Width Integrated Toolbox
- Dual 12000 lb Rated Drop Leg Jacks
- Solar Battery Maintainer

POWER TILT



Size	GVWR	Payload
102" x 22'	15000	10515
102" x 22'	17600	12775

- Integrated Tongue Mounted Pump and Toolbox
- 10" I-Beam Frame, 34" Deck Height
- Welded D-Rings
- Power-Up, Power-Down Hydraulics
- 12000 lb Drop Leg Jack
- Under Mount Spare Tire Carrier

OPTIONAL 15000 LB RATED
HYDRAULIC TONGUE JACK



LOW PROFILE

DECKOVER TRAILERS

ENCLOSED CARGO TRAILERS

Built with industry-leading features, H&H Enclosed Trailers deliver confidence and performance for a smooth journey from start to finish. Rest assured your valuable cargo will stay dry and protected from the elements.

H&H TRAILERS ADVANTAGE

ENGINEERED WOOD INTERIOR




Using 3/8" engineered wood walls with an aluminum, H-channel panel divider adds strength plus a clean, finished look.

SCREWLESS EXTERIORS



Bonded by VHB™ tape for superior strength and a sleek design.

INTERIOR DOME LIGHTS

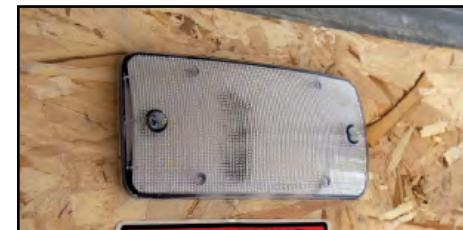


Each unit is equipped with a 12-volt, LED interior light with switch.

EXTERIOR PROTECTION



A vapor barrier, complete undercoating and a polyurea coating on the tongue and rear bulkhead protect your investment.

HH SERIES FLAT TOP



DOOR HOLD-BACK

- 30" Deep V-Nose
- .030 Aluminum Exterior
- Drop Spring Suspension
- Economical Single and Tandem Axle Models
- Optional Posi-Vent System and Door Bar Lock



Additional Sizes Available

HH SERIES ROUND TOP



REAR DOOR ZINC BAR LOCKS

- Round Top Round Front Design
- Custom Fiberglass Nose Cap
- 82" Interior Height
- 74 1/2" Rear Door Opening Height
- Optional Posi-Vent System and Door Bar Lock



OPTIONAL V-NOSE



Additional Sizes Available.

TOPLINE SERIES ROUND TOP



REINFORCED STEEL FLOOR PAN



POSI-VENT

- .040 Aluminum Exterior (Standard Colors)
- Full Tubular Construction, 16" On-Center Spacing
- Reinforced Steel Floor Pan and Front Corners
- Integrated Ramp Transition
- Ramp Spring Cover
- Torsion Suspension and Aluminum Wheels
- Gooseneck Models Available



OPTIONAL E-TRACK



INTEGRATED STEEL TRANSITION

Additional Sizes Available.

Size	GVWR	Payload
7' x 12' TA	7000 9900	4475 7055
7' x 16' TA	7000 9900	4235 6815
7' x 20' TA	7000 9900	3875 6455
8' x 16' TA	7000 9900	4085 6665
101" x 16' TA	7000 9900	4010 6590
101" x 18' TA	7000 9900	3770 6350

ENCLOSED CAR HAULER TRAILERS

Designed with your vehicle in mind, H&H Enclosed Car Hauler Trailers offer complete protection from the elements. Each equipped with industry-leading features: 16" on-center roof, wall and crossmember spacing, 24" tall rock guard, 4,000 lb rated ramp doors with spring assist, interior dome lights, 36" side doors and more.

Your prized possessions will be thankful you hauled them safely and securely.

H&H TRAILERS ADVANTAGE

SCREWLESS EXTERIOR



Bonded by VHB™ tape for provide superior strength and a sleek design.

GALVANIZED ROOF BOWS



As an important part of the structure, we protect the roof bows for the long haul.

INTERIOR DOVETAIL



Provides an extra 2" of load clearance and allows you to load with ease.

INTERIOR TIE-DOWNS



Each trailer is equipped with interior tie-downs to secure your load for safe arrival.

HH SERIES FLAT TOP



INTERIOR LIGHTING

- 30" Deep V-Nose
- .030 Aluminum Exterior
- Floor Mounted D-Rings
- Drop Spring Suspension
- Shown with Optional Posi-Vent System

Size	GVWR	Payload
101" x 20'	9900	6650
101" x 24'	9900	6410
101" x 28'	9900	6170
101" x 20'	14000	11340
101" x 24'	14000	10100
101" x 28'	14000	9960

Additional Sizes Available.



HH SERIES ROUND TOP



FLOOR MOUNTED D-RINGS

- Round Top Round Front Design
- .030 Aluminum Exterior
- Custom Fiberglass Nose Cap
- 82" Interior Height
- 74 1/2" Rear Door Opening Height

Size	GVWR	Payload
101" x 20'	9900	6600
101" x 24'	9900	6360
101" x 28'	9900	6120
101" x 20'	14000	10290
101" x 24'	14000	10050
101" x 28'	14000	9810



OPTIONAL V-NOSE



Additional Sizes Available.

TOPLINE SERIES ROUND TOP



RAMP SPRING COVER



INTERIOR STEP

- .040 Aluminum Exterior (Standard Colors)
- Full Tubular Construction, 16" On-Center Spacing
- Reinforced Steel Floor Pan And Front Corners
- Integrated Ramp Transition
- Torsion Suspension and Aluminum Wheels

Size	GVWR	Payload
101" x 20'	9900	6150
101" x 24'	9900	5850
101" x 28'	9900	5550
101" x 20'	14000	10000
101" x 24'	14000	9700
101" x 28'	14000	9400


Additional Sizes Available.



POLISHED FRONT CORNERS
OPTIONAL V-NOSE AND POLISHED NOSE



GOOSENECK MODELS AVAILABLE
OPTIONAL V-NOSE
OPTIONAL POLISHED NOSE

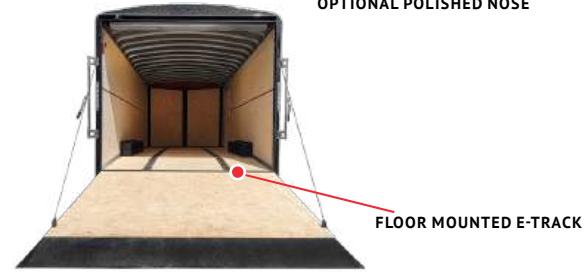

FLOOR MOUNTED E-TRACK

PROVEN PERFORMANCE. TRUSTED RELIABILITY.



VISIT US!

[f](https://hhtrailer.com) [o](https://www.instagram.com/hhtrailer.com) [in](https://www.linkedin.com/company/hhtrailer.com) hhtrailer.com

This document is provided for informational purposes only.

Pictures, illustration, and text may include options and accessories not available at all times or as standard equipment. Contact your local dealer (sales representative) for exact specifications. All trademarks, services marks, trade names, trade dress, products names and logo appearing in this document are the property of their respective owners. Novae®, H&H Trailers®, and Topline® are registered trademarks of Novae LLC. All rights reserved.

© 2025 Novae LLC



H&H Trailers Division
Novae LLC
1400 E. Washington Street
Clarinda, IA 51632

Authorized H&H Trailers Dealer

